



SWIMMING POOL LINERS

Discover the exciting new products in the world of swimming pool equipment! In addition to the proven heat-insulating shuttering peripor stones for pool construction in accordance with DIN EN 13163, we offer our swimming pool liners in new, attractive colors Urban Grey, Mountain Blue, Sand Stone and Indian Marble from the Pure series and Dove Blue or Night Blue from the Supra series as well as the colors Sunlight, Darkstar, Bluemoon from the Keramik Collection bring a modern look to your pool.

But that's not all! Our water attractions, including color changes, provide that little bit extra, enhancing every pool and creating a unique atmosphere in the evening. Our products not only impress with their elegant design, but also with their high-quality workmanship using first-class materials such as stainless steel or acrylic glass. And no pool system would be complete without a solar shower - the perfect way to freshen up after a refreshing swim. Discover the world of swimming pool equipment now and bring your pool dreams to life!

OVERVIEW

SHUTTERING BLOCKS

P. 186 Peripor stones PS30L, PS30XXL, PS40L und PS40XXL

SWIMMING POOL LINER, STEP PROTECTION & LIQUID LINER

P. 18 <i>7</i>	Swimming pool liner Pure
P. 188	Swimming pool liner Elite Motion
P. 189	Swimming pool liner Pearl
P. 190	Swimming pool liner Elite
P. 192	Swimming pool liner Keramik
P. 193	Swimming pool liner Supra
	P. 188 P. 189 P. 190 P. 192

LAMINATED SHEETS

P. 196

P. 194

SEPARATING & PROTECTIVE FLEECE

Swimming pool liner Classic

P. 197

ACCESSORIES FOR FOIL

P. 197






SHUTTERING BLOCKS



SPECIAL FEATURES:

- · Material: EPS, Peripor
- Produced according to EN ISO 9001: 2008
- Including end slider: 25 pieces for XXL blocks (height 50 cm) 50 pieces for L-bricks (height 25 cm)
- Compressive stress according to EN 836: 150 kPa at 10 % compression
- Thermal conductivity according to EN 12667:
 0.035 lambda ((W/m*K))
- Divisible in units of 25 cm




¹ For a 150 cm deep pool (4 corners), 24 end sliders are required when using XXL bricks (height 50 cm) and 48 end sliders (8 per layer) when using L bricks (height 25 cm).

For additional corners, stairs or special shapes, you will need additional end sliders (subject to a charge).

ADVANTAGES OVER POLYSTYRENE:

- ✓ Does not absorb moisture
- 100% recycelbar (kein Sondermüll)
- Filling is generally not necessary as the joints are very narrow and there are no cutting bars on the inside of the basin (every 25 cm)

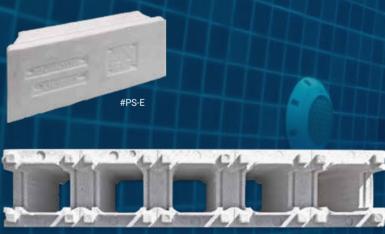

View from above

Regardless of the usual flat-rate freight charges, shipping costs (on request) apply

Article	Dimensions L x B x H	Concrete filling quantity	Density	Color	UP	Code
Peripor stone PS30L	100 x 25 x 25 cm	30,20 l	30 g/l	weiss	40	PS30L
Peripor stone PS30XXL	125 x 25 x 50 cm	66,151	30 g/l	weiss	16	PS30XXL
Peripor stone PS40L	100 x 25 x 25 cm	30,20 l	40 g/l	grau	40	PS40L
Peripor stone PS40XXL	125 x 25 x 50 cm	66,15 l	40 g/l	grau	16	PS40XXL
End slide PS30	14 x 8 x 4 cm	_	30 g/l	white	1	PS-E
Spray adhesive Poly 500 m	nl —	_	_	-	12	8054



STONES WITH A DENSITY OF 60 G/L OR 80 G/L ARE AVAILABLE ON REQUEST



SWIMMING POOL LINERS



SWIMMING POOL LINERS PURE











NEW

Inspired by the colors, shapes and textures of natural stone, Pure creates the impression of untouched rocky landscapes. The charismatic colors radiate comfort, calm and warmth. Gently textured 3D surfaces blend harmoniously into natural pool landscapes and ensure pure bathing pleasure. Pure swimming pool lanes are not only an absolute eye-catcher visually. In addition to their specially textured surface and stylish designs, Pure also boasts excellent product properties.

Max. Water temperature: +33°C PU: 8 rolls/pallet









































SCRATCH RESISTANCE

NATURAL





$(one roll = 34,65 m^2)$

ROLL LENGTH 21m X 1,65m (WIDTH)

Color	Code
Pure Terra Sand (8)*	20.265
Pure Ocean Grey (8)*	20.266
Pure Urban Grey	20.273
Pure Mountain Blue	20.261
Pure Sand Stone	20.262
Pure Indian Marble	20.263

*Suitable liquid foil can be found on catalog page 196, sorted by number.

Note on the color display: The pool liner colors shown may vary depending on water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water



ACCESSORIES FOR BUTT WELDING

Article	Code
Welding strips 1.5 mm. 15 cm x 25 m	20.799





FABRIC-RENFORCED SWIMMING POOL FILM ELITE MOTION

Superior pools

NEW

elite® motion combines excellent product features with a uniquely stylish 3D surface. The film not only offers outstanding protection against contamination along the waterline, but also impresses with its exceptional UV resistance and color fastness

Max. water temperature +35°C PU: 6 rolls/pallet
























Thickness: 1,8 mm























EXTREMELY EASY TO CLEAN





EXCELLENT SCRATCH RESISTANCE





LONGER LIFETIME





BEST CHOICE FOR PUBLIC POOLS

EXTREME

CHLORINE RESISTANCE

3D SURFACE



ROLL LENGTH 21m x 1.65m (WIDTH) (one roll = 34,65 m²)

Color	Code
Arctic white (4)*	20.294
Black stone (6)*	20.295
Blue sky (2)*	20.298
Deep sea (1)*	20.297
Grey Rock (5)*	20.293
Sand beach (6)*	20.292

the water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.

ACCESSORIES FOR BUTT WELDING

Article	Code
Welding strips 1,5 mm, 15 cm x 25 m	20.799





SWIMMING POOL LINER PEARL

PRINTED & SURFACE-FINISHED

The pool liner with pearlescent reflection is dirt-repellent, resistant to the strongest stains and UV radiation. Depending on the incidence of light, light source or degree of illumination, the amazingly real mother-of-pearl effect creates a uniquely vivid and brightly shimmering play of colors. Weather and cold resistant, antimicrobial treatment.

Max. Water temperature: +33°C PU: 8 rolls/pallet










DIMENSIONS

Roll length: 21 m


Width: 1,65 m

Thickness: 1,6 mm















HIGH STAIN RESISTANCE



3D SURFACE



LONGER



HIGH SCRATCH RESISTANCE



BREATHTAKING REFLECTIVE PROPERTIES



EASY TO



HIGH CHLORINE RESISTANCE



PROTECTION AGAINST BACTERIA & FUNGI



QUICK & EASY INSTALLATION

ROLL LENGTH 25M X 1.65M (WIDTH)

 $(one \ roll = 41.25 \ m2)$

Color	Code
White Pearl (1)*	20.787
Black Pearl (6)*	20.776
Blue Pearl (10)*	20.777
Sand Pearl (4)*	20.984
Silver Black (7)*	20.007
Silver Lagoon (11)*	20.939

Note on color display: The pool liner colors shown may vary depending on water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.





FABRIC REINFORCED SWIMMING POOL FILM ELITE <

elite)
Superior pools.













Roll length: 25 m

Width: 1,65 m or 2,00 m

Thickness: 1,5 mm















XTREME EXTERNING TO THE TRANSPORT TO THE



CHLORINE RESISTANCE

EXTREMELY EASY TO CLEAN



EXCELLENT SCRATCH RESISTANC



BEST CHOICE OR PUBLIC POOLS



LONGER





QUICK & EASY INSTALLATION

elite® is the first phthalate-free fabric-reinforced swimming pool membrane on the market.Extremely stain-resistant, scratch-resistant, UV-resistant, chlorine-resistant, easy to weld, easy to clean. The world's first for a cleaner environment and longer pool enjoyment is the world's healthiest choice. This liner has a revolutionary surface that inhibits the penetration of cosmetics, sunscreen, etc. and requires less cleaning. With the elite® liner, the pool retains its original color for many years, looks fresh,

Max. Water temperature +35°C. PU: 8 rolls/pallet

clean and invites you to swim.



















ROLL LENGTH 25m x 1.65m (WIDTH)

 $(one \ rollw = 41,25 \ m^2)$

Color	Code
Deep Sea (1)*	20.068
Blue Sky (2)*	20.069
Sand Beach (3)*	21.070
Artic White (4)*	20.071
Grey Rock (5)*	20.173
Black Stone (6)*	20.122

ROLL LENGTH 25m x 2,00m (WIDTH)

(one roll = 50 m^2)

Color	Code
Deep Sea (1)*	20.119
Blue Sky (2)*	20.118
Sand Beach (3)*	21.120
Artic White (4)*	20.117
Grey Rock (5)*	20.121
Black Stone (6)*	20.123

Note on color display: The pool liner colors shown may vary depending on water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.





STEP PROTECTION ELITE

The textured surface ensures maximum slip resistance on steps, in children's paddling pools and walk-through pools. Free of heavy metals and resistant to standard swimming pool care and water cleaning agents. Resistant to ageing and rotting, stabilized against UV radiation, weldable, cold-resistant and antimicrobial.












Width: 1,65

Thickness: 1,9 mm









PROTECTION AGAINST BACTERIA, FUNGI & ALGAE







EXTREME





0





EXTREME SCRATCH RESISTANCE





LONGER LIFETIME









ROLL LENGTH 10m x 1.65m (WIDTH)

 $(one roll = 16,50 m^2)$ (15 % SURCHARGE FOR CUTTING TO THE REQUIRED LENGTH)

Color	Code
Arctic White (4)*	20.079
Sand Beach (3)*	20.078
Blue Sky (2)*	20.077
Deep Sea (1)*	20.076
Grey Rock (5)*	20.080
Black Stone (6)*	20.124



ELITE LIQUID FILM

Seam sealing of weld seams on fabric-reinforced swimming pool membranes, container size: 950 ml (can), also available individually.

Color	Code
Deep Sea (1)	21.396
Blue Sky (2)	21.395
Sand Beach (3)	21.394
Artic White (4)	21.393
Grey Rock (5)	21.403
Black Stone (6)	21.536







SWIMMING POOL LINER KERAMIK

NEW

Discover the innovative KERAMIK collection from CEFIL POOL - a true revolution in the world of pool liners! This collection combines elegance and exclusivity in one product and gives traditional porcelain stoneware tiles new advantages. The reinforced membranes of the KERAMIK collection stand for luxury and exceptional, tangible quality. The elegance of these membranes creates a visual experience and transports you into a world of sophistication. Installation is quick, uncomplicated and waste-free.

(For liquid membranes, see page 196) Max. Water temperature +32°C.

PU: 10 rolls/pallet

KERAMIK







DIMENSIONS



Roll length: 25 m

Width: 1,65 m

Thikness: 1,5 mm









3D SURFACE



DURABLE & ROBUST



MODERN & LUXURIOUS



SIMPLE INSTALLATION



UV RESISTANCE



LOW MAINTENANCE



FLEXIBLE & EASILY CUSTOMIZABLE



ANTI-SLIP SURFACE





Color	Code
Sunlight (15)*	20.267
Bluemoon (16)*	20.268
Darkstar (17)*	20.269

Note on the color display: The pool liner colors shown may vary depending on the water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.



FABRIC REINFORCED SUPRA SWIMMING POOL LINER




With high-quality surface finishing to protect against soiling and discoloration, antimicrobial finish, stable against UV radiation, cold-resistant, tear-resistant and hard-wearing. Max. Water temperature +32°C. PU: 8 rolls/pallet


















Width: 1,65 m oder 2,00 m

Thikness: 1,5 mm









EXTREME STAIN RESISTANCE





3D SURFACE


















EXTREME
CHLORINE RESISTANCE




PROTECTION AGAINST



DESIGNS





ROLLER LENGTH 25M X 1.65M (WIDTH) $(one roll = 41,25 m^2)$

Color	Code
White (1)*	20.049
Adriatic blue (2)*	20.410
Light blue (3)*	20.052
Sand (4)*	20.051
Light gray (5)*	20.055
Dark grey (6)*	20.786
Mosaic blue (1)*	20.749
Mosaic gray (1)*	20.190
Marble (1)*	20.191
Pigeon blue (13)	21.338
Night blue (14)	21.340

ROLL LENGTH 25M X 2.00M (WIDTH) (one roll = 50 m^2)

Color	Code
White (1)*	20.048
Adriatic blue (2)*	20.409
Light blue (3)*	20.053
Sand (4)*	20.054
Light gray (5)*	20.074
Dark grey (6)*	20.910

Note on color display: The pool liner colors shown may vary depending on the water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.





FABRIC-REINFORCED SWIMMING POOL LINER CLASSIC




The fabric-reinforced swimming pool liners are the ideal material for lining fixed pools of all shapes and sizes, both indoors and outdoors. Extremely tear-resistant, hard-wearing and resistant to weathering, cold, fungi and bacteria. Suitable for any load-bearing substrate. Max. Water temperature +32°C PU: 8 rolls/pallet





































LONGER LIFETIME







ROLL LENGTH 25M X 1.65M (WIDTH)

(one roll = 41,25 m²)

Color	Code
White (1)*	20.045
Adriatic blue (2)*	20.061
Light blue (3)*	20.403
Turquoise (9)*	20.057
Sand (4)*	20.405
Light gray (5)*	20.073
Dark grey (6)*	20.529
Black (7)*	20.579

ROLL LENGTH 25M X 2.00M (WIDTH)

(one roll = 50 m^2)

Color	Code
White (1)*	20.047
Adriatic blue (2)*	20.063
Light blue (3)*	20.404
Turquoise (9)*	20.058
Sand (4)*	20.406
Light gray (5)*	20.072
Dark grey (6)*	20.628

Note on color display: The colors of the pool liners shown may vary depending on water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.



FABRIC-REINFORCED TREAD PROTECTION MEMBRANE

The textured surface ensures maximum slip resistance on steps, in children's paddling pools and walk-through pools. Free of heavy metals and resistant to standard swimming pool care and water cleaning agents. Resistant to ageing and rotting, stabilized against UV radiation, weldable, cold-resistant and antimicrobial.


















Roll Length: 10 m

Width: 1,65 m

Thickness: 1,9 mm



EXTREME



EXTREME STAIN RESISTANCE



EXCELLENT SCRATCH RESISTANCE




PROTECTION AGAINST BACTERIA,FUNGI & ALGAE




EXTREMELY EASY TO CLEAN



LONGER LIFETIME





Light gray






ROLL LENGTH 10M X 1.65M (WIDTH)

 $(one roll = 16,50 m^2)$

(15 % SURCHARGE FOR CUTTING TO THE REQUIRED LENGTH)

Color	Code
White (1)*	20.765
Adriatic blue (2)*	20.772
Light blue (3)*	20.768
Turquoise (9)*	20.769
Sand (4)*	20.766
Light gray (5)*	20.767
Dark grey (6)*	20.771
Black (7)*	20.770
Pigeon blue (13)*	20.773
Night blue (14)*	20.774



Note on the color display: The pool liner colors shown may vary depending on water depth and lighting. The illustrations serve only as examples and are intended to give an impression of how the liners may look under water.





LIQUID FILM

Seam sealer for welded seams on fabric-reinforced swimming pool membranes, container size: 950 ml (can), also available individually.

Color	PU	Code
White (1)	6	21.054
Adriatic blue (2)	6	21.048
Light blue (3)	6	21.053
Sand (4)	6	21.056
Light gray (5)	6	21.046
Dark grey (6)	6	21.154
Black (7)	6	21.190
Transparent (8)	6	21.055
Turquoise (9)	6	21.049
Blue Pearl (10)	6	21.246
Silver Lagoon (11)	6	21.274
Silver Black (12)	6	21.247
Pigeon blue (13)	6	21.345
Night blue (14)	6	21.346









#21.270

#21.272



LIQUID FILM KERAMIK COLLECTION

Seam sealing of weld seams on fabric-reinforced swimming pool membranes, container size: 1000 ml (can), also available individually.

Color	PU	Code
Sunlight for Keramik Collection (15)	6	20.270
Bluemoon for Keramik Collection (16)	6	20.271
Darkstar for Keramik Collection (17)	6	20.272



FOIL COMPOSITE SHEET

For the installation of fabric-reinforced swimming pool membranes. Composite sheet thickness: 1.2 mm

Article	Color	Dimensions (mm)	PU	Code
Blackboard	Blue	2000 x 1000	30	21.063
Stripes	Blue	70 x 2000	10	21.071
External angle	Blue	70 x 30 x 2000	10	21.068
Inside angle	Blue	70 x 30 x 2000	10	21.067
External angle	Blue	100 x 30 x 2000	10	21.064
Inside angle	Blue	100 x 30 x 2000	10	21.065
External angle	Blue	50 x 50 x 2000	10	21.066
Inside angle	Blue	50 x 50 x 2000	10	21.069

Acceptance: individually possible

PACKAGING Sheet; PU: 30/pallet Outside angle, strips, inside angle; PU: 10/pc.



ANTIBACTERIAL SEPARATING AND PROTECTIVE FLEECE



Antibacterial separating and protective fleece available in 300 g/m², thermally bonded polyester fibers, resistant to drilling and screwing. Color: light green.

WIDTH: 2,00 METER (one roll = 100 m²)

Article	Quality	PU	Code
Antibacterial fleece	300 g/m²	6 Rolls	20.505

WIDTH: 1,50 METER (one roll = 75 m²)

Article	Quality	PU	Code	
Antibacterial fleece	300 g/m²	6 Rolls	20.504	

DIMENSIONS Width: 2,00 m Roll length: 50 m





SEPARATING AND PROTECTIVE FLEECE

Separating and protective fleece available in 300 g/m² and 500 g/m², thermally bonded polyester fibers, drillable and screw-proof, rot-proof, diffusion-open, compatible with films and bitumen. Color: white, also available individually. B2-DIN 4102.

DIMENSIONS

Thickness: 2 mm (300 g/m²) Thickness: 4 mm (500 g/m²) Width: 1,50/2,00 m Roll length: 50 m

WIDTH: 1,50 METER

Article	Quality	PU	Code
Fleece	300 g/m ²	6 Rolls	20.500
Fleece	500 g/m²	5 Rolls	20.506

WIDTH: 2,00 METER

Article	Quality	PU	Code
Fleece	300 g/m ²	6 Rolls	20.501
Fleece	500 g/m²	5 Rolls	20.502





FOR PROFESSIONAL SWIMMING POOL LANE LINING

Indoor and outdoor pools of any shape and size can be lined with swimming pool liners. This applies to both new builds and the renovation of existing pools with substrates made of concrete, masonry, wood, steel, aluminum, polyester and embankment-supported pools with an incline of up to 60°. The right accessories for installation are a must to ensure that the lining of the pool is carried out professionally.

Note: Fleece adhesive Pro, 5 kg bucket #8045 is not suitable for the pool wall

Article	PU	Code
Small spray bottle, 250 ml	5	21.001
Spray bottle, 500 ml	5	21.000
Spray adhesive for pool fleece, 500 ml*	12	8046
Styro spray adhesive for pool fleece, 500 ml	12	8054
Swelling welding fluid THF, 1,000 ml	6	21.039
Fleece adhesive Pro, 5 kg bucket	1	8045
Hammer rivets, long, 35 mm	12 pack of 100 pieces	21.382
Hammer rivets short, 20.3 mm	12 pack of 200 pieces	21.381

*for concrete basins













#8045





TOOLS FOR WELDING











Article	Code
Weld seam tester	06.018
Universal scissors 260 mm with special serrated edge	06.021
Pressure roller with ball bearing, brass; width 6 mm	06.016
Pressure roller with ball bearing, silicone; width 43 mm	06.013
Kehlfix for waterproofing membranes; width 55 mm	06.019



ELBE THERMO GLUE

NEW

Ready-to-use, one-component adhesive. Suitable for bonding PVC films to wood, concrete, rigid PVC, GRP or similar surfaces. Processing should be carried out at ambient temperatures above + 5 °C.

The most favorable processing temperature is + 18 °C to + 25 °C.

- · Enormous time saving during stair installation, especially with free-form stairs
- Saves sheet metal and sheet metal processing by sticking the film directly onto the substrate
- · Very suitable for sticking on underlay welding strips head-to-head welding is easier and
- Perfect for the wet-wet process
- Suitable for bonding film to roll covers

Easy to use: Apply adhesive, allow to air dry for 10-15 minutes - once dry - no more sticking. For installation, simply activate with heat and apply the film

Article	Code
Thermo Glue	21.397







HOT AIR HAND TOOL SUITABLE FOR CONSTRUCTION SITES

ENERGIE- SPARSAM

Triac ST

TRIAC ST impresses with the successful combination of a highly robust motor and a modern design. The ergonomic design and low weight ensure optimum user comfort. For plug-in nozzles. With EU plug. Case included.





power control

Technical data	
Voltage	230 V / 50Hz
Performance	1600 W
Temperature	40 - 700°C
Protection class	II
Dimensions (L x ∅)	338 mm x 90 mm



Triac AT

Intelligent, construction site-compatible hot air hand tool with energy-saving function and ergonomic design for welding swimming pool liners. Energy-saving function with ECO Motion Sensor (configurable) recognizes when the device is not in use and thus saves up to 40 % of energy with additional noise level reduction. For plug-in nozzles. With EU plug.



Technical data	
Voltage	230 V / 50Hz
Performance	1600 W
Temperature	40 - 620°C
Protection class	II
Dimensions (L x Ø)	335 mm x 90 mm


Article	Code
Trirac ST	06.002
Triac AT	06.001



ACCESSORIES FOR TRIAC ST AND TRIAC AT

#06.008







#06.010

Others available on request.